



U3 Ultra Slim Series Adapter



Features

- Up to 50% smaller in size than the regular one*
- Extremely light weight
- $\geq 90\%$ high conversion efficiency meets system energy efficiency requirements
- Standby power saving: meet DoE Level 6, CoC v5 Tier2
- Safety: UL, TUV, CCC, FCC, CE, CB
- Safety Guard: OCP, OVP, OPP, OTP


*compared to FSP N3 series models

Applications

- Gaming NB
- AIO Computer
- NUC
- POS Machine

U3 Ultra Slim Series Adapter

Series	Dimension (mm)	Volume	Max. Power Density	Size Reduced	Status
N3 90W	19.0V	4.74 A	C6	-	MP
N3 120~180W	19.0V	6.32 A	C6	-	MP
U3 90W	19.0V	6.93 A	C6	39.2%	Plan
U3 120/135W	19.0V	7.70 A	C6	51.4%	DVT
U3 150/180W	19.0V	9.23 A	C6	43.8%	EVT

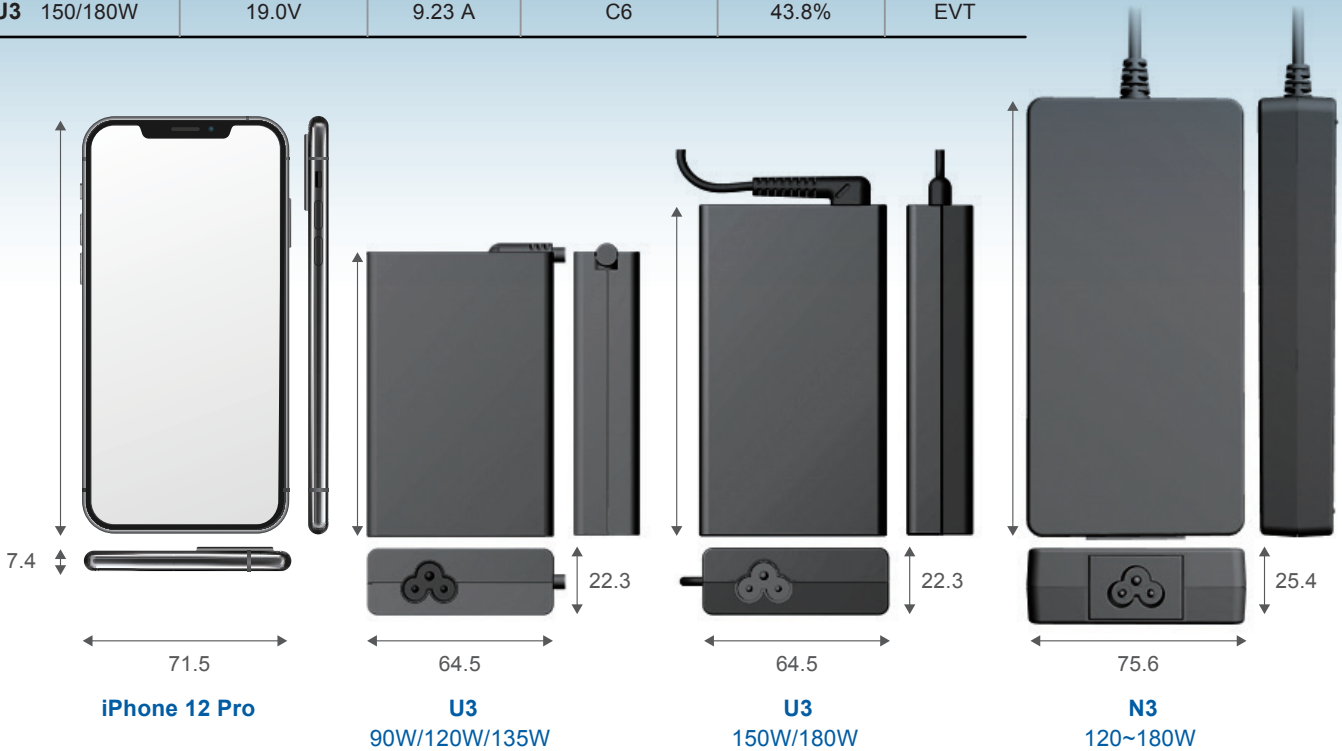

Model	Output Voltage	Output Current	AC Inlet	Efficiency			OVP	Status
				DOE (Level VI) Mandatory	ErP Lot 7 Mandatory	CoC v5 Tier 2 Voluntary		
FSP090-ABBU3	19.0V	4.74 A	C6	✓	✓	✓	29 V	Plan
FSP120-ABBU3	19.0V	6.32 A	C6	✓	✓	✓	29 V	DVT
FSP135-AJBU3	19.0V	6.93 A	C6	✓	✓	✓	29 V	DVT
FSP150-AJBU3	19.0V	7.70 A	C6	✓	✓	✓	29 V	DVT
FSP180-AJBU3	19.0V	9.23 A	C6	✓	✓	✓	29 V	DVT

Safety

